

Standalone Voice Logger
AR-100/AR-120



Basic Information

- | | | |
|----------------------|---|-----------|
| 1. Model No. | - | AVL-TX100 |
| 2. Specification | - | 15x10x3 |
| 3. Origin | - | India |
| 4. Transport Package | - | Gift Box |
| 5. Trademark | - | Aegis |




Product Description

AR 100/120 is a single line Plug and play standalone Voice Logger (Without PC) with 1.5” backlit screen. Equipped with 8 GB SD-Card records upto 32000 minutes recording. AR100/120 have provision of In-built speaker to play recording from device itself.

Single Line Voice Logger | Ar100

APPEARANCE

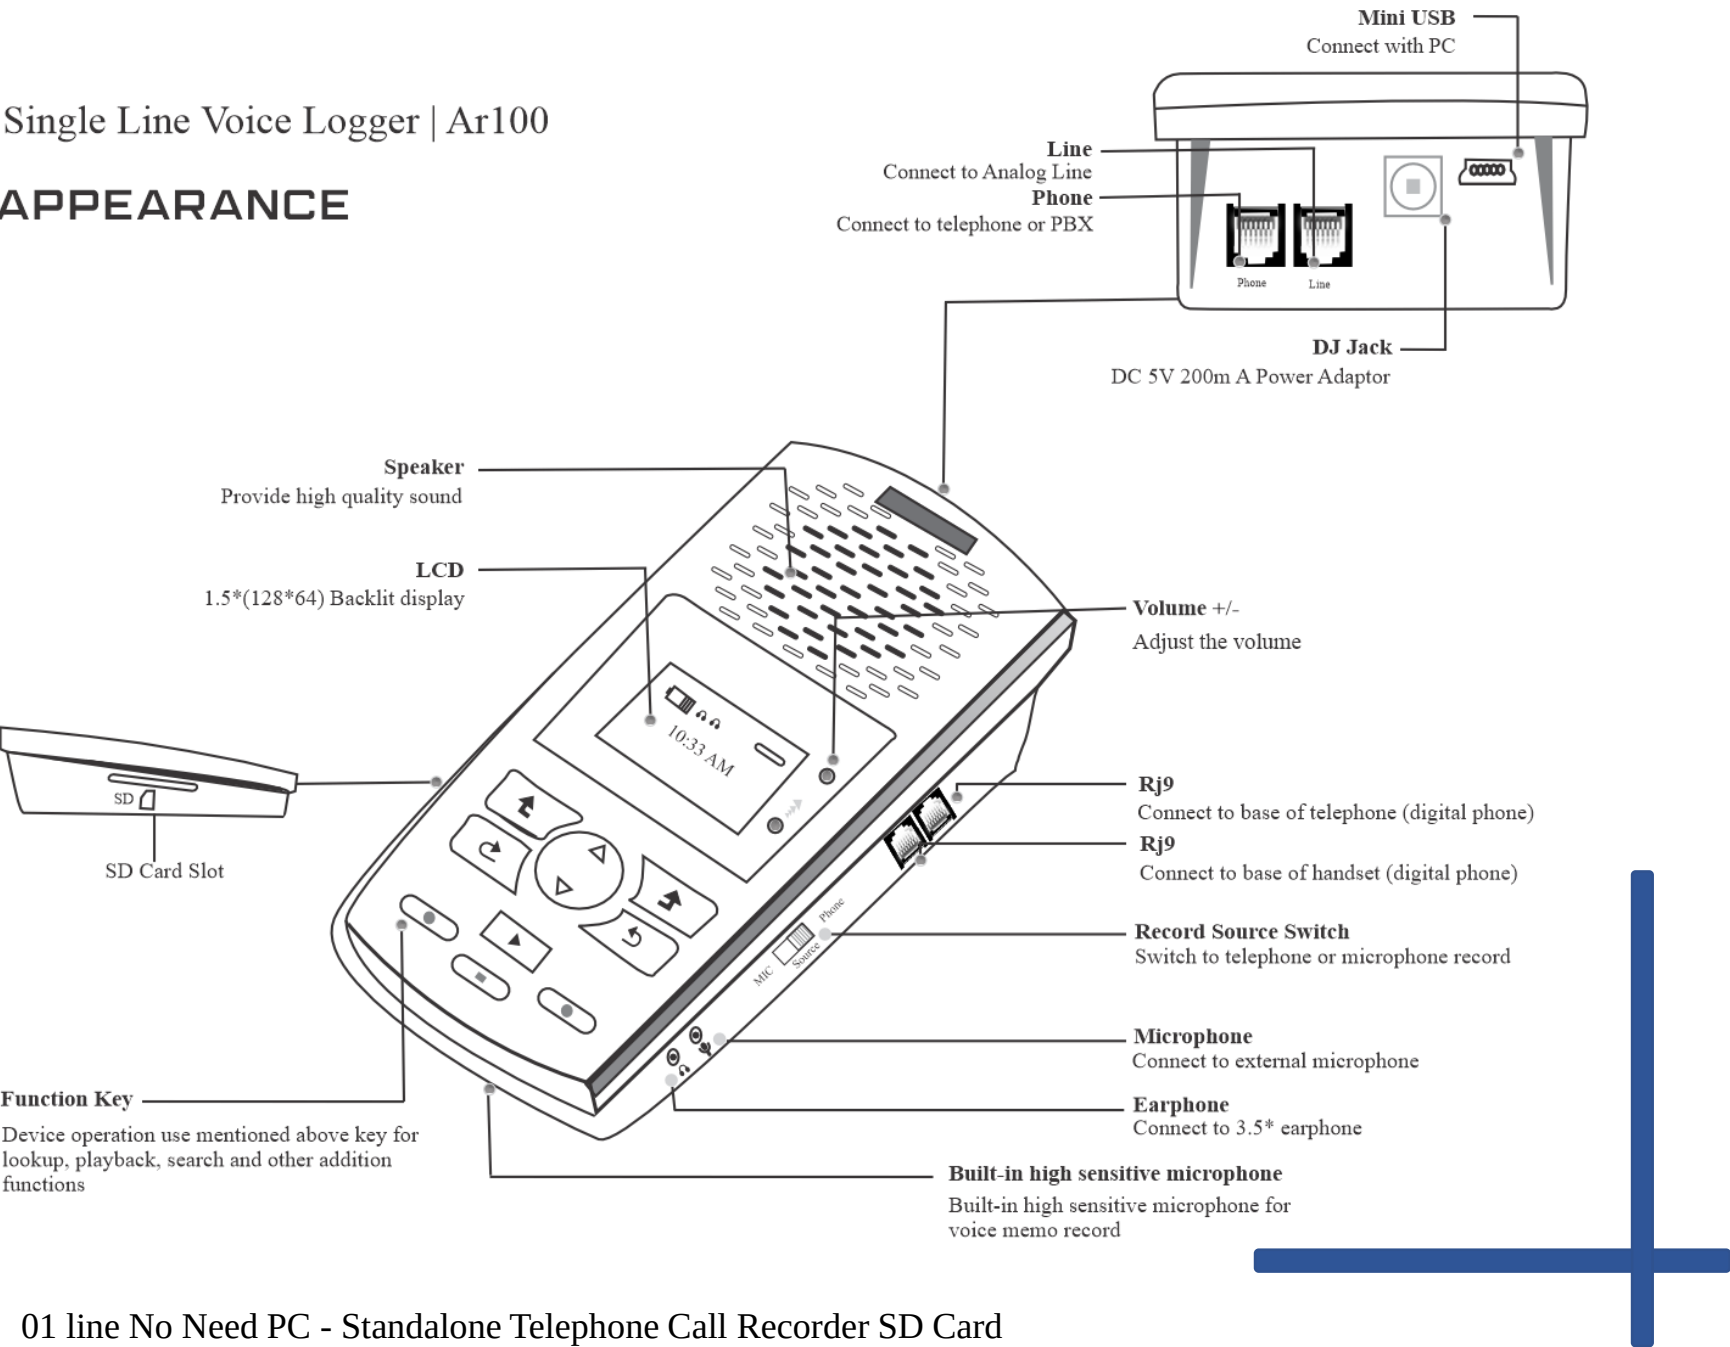

01 line No Need PC - Standalone Telephone Call Recorder SD Card
Voice Logger with Auto-Answer & Call Announcement

Flexible Solutions For Your Business

STANDALONE VOICE LOGGER PRODUCT FEATURES



Large Recording Capacity

2300 hours of call storage (5 day a week, 8 hours per day can be recorded in one year)



Light and Simple, No PC Required

Stand - alone operation, pc required. It's easy to carry with its 165 weight and 1.5" backlit screen.



AGC Control

Advanced gain control between local and remote side makes the sound perfectly balanced.




High Quality Speaker

High power speaker allows to play back audio recording clearly.



Built-in High Sensitive Microphone

Built-in sensitive microphone Allows you to record voice memo in AR100 directly.



High Quality Audio Circuit Design

AR100 provides high quality recording sound with low noise, low attenuation, high-sensitivity circuit.



Various Recording Interface

Support to PSTN, analog extension, digital extension, microphone, audio adaptor, environment, meeting, 2-way radio and radio broadcasting recording.



Automatic/Manual Recording

Records all automatically as default or configures it as manually start.



Recording Announcement

It can be played when you first answer a call.



Complete Call Recorders

Record call conversation, call type, date, time, incoming? Outgoing number, call duration, recording duration and important mark.



Various Search Conditions

Search call records according date time, call type or phone number.



Alert

Various alert notification to avoid recording interruption.



Integrate Management

Play, Search, back up and email audio file via USB connection or SD card reader.



Email Recording to Colleague

Send certain of recording to Colleagues (as .wav file or compressed file) by email



Answering Machine

Enable DUET on answering machine when user is not available. Allows user to access remotely access for new message retrieve.



Email Recording to Colleague

Import outlook address book



Back Up Call Detail Recording

Enable to back conversation audio file and call details in PC or CD-ROM



Real Time Monitor

Monitor line status and call numbers



Manage and Back Up Recording

You can manage and back up CDR or audio file via USB connection by C program.



Backup Recording

Enable to back up call recorder of SD card to PC optional by automatic or manual. The audio file would be deleted if it is back up already. you can save a copy in CD-ROM as well.



Category List

Look up all type call recording by category



Parameter Configuration

you can configure AR 100 Parameter via PC.




Player Interface

Unique player indicates sound or silent in display. you can repeat specific section of audio file through PC program.

TECHNICAL SPECIFICATION

Model No:	
AVL-TX100	1port Standalone Voice Logger Without PC
Technical Parameters:	
Recording Interface	standard RJ11 connector / Standard the RJ9 Connector / Built-in microphone / 3.5-inch microphone connector
Recording Compression Format	ADPCM 4KB / S
Recording File Formats	.WAV
Start Recording Mode	voltage start-up / voice - activated (VOX) / manual recording
Recording Type	outside (outside) / analog phone (switch inside) / digital phone (switch inside) / environmental record / conference recording / microphone recording
Loop number	single-loop
Audio Device	Built-in speaker, 3.5-inch headphone jack / built-in microphone, 3.5-inch microphone connector
Storage	SD card, maximum support 32G, 1G can be recorded 70 hours
Size	145X70X40MM
Weight	165G
Power supply	DC 5V 200MA / battery AAAX3

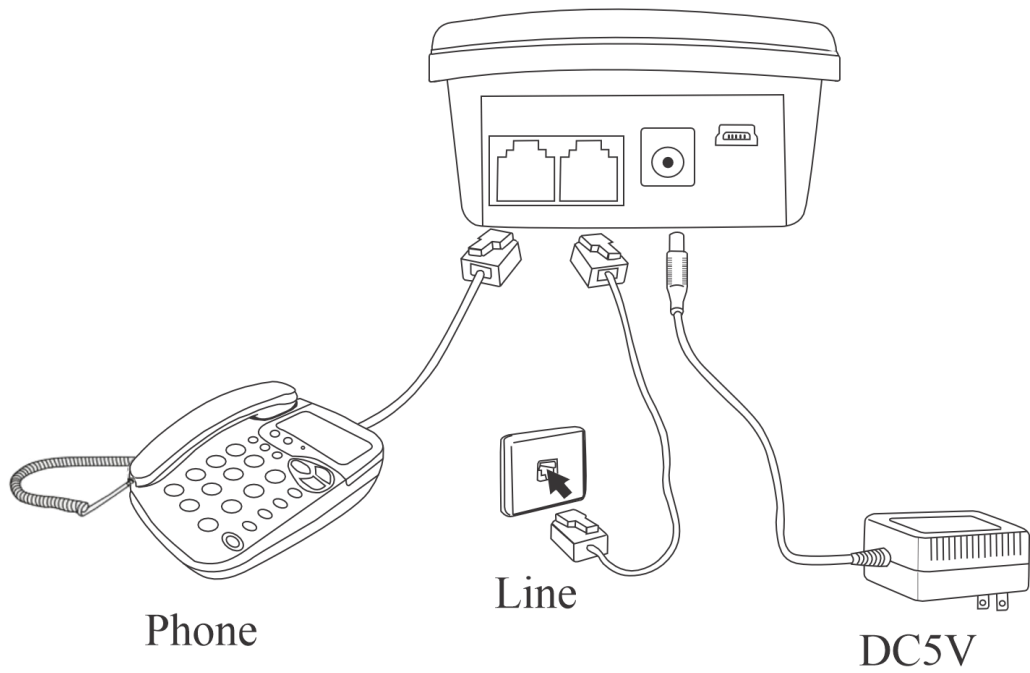

Accessories:

Machine	X1
USB Line	X1
RJ11 Telephone Line	X1
The RJ9 Phone Line	X1
DC 5V Adaptor	X1 (the 220V/110V USA / 220V Europe/220V UK)
CD	X1



Aegis Informatics Pvt. Ltd.

205 - 207 Second Floor, Building No. A-9,
Sector 59 Noida, Uttar Pradesh 201301

Sales: +91-120-4491 000

Support: +91-120-4491 010

Email Id Sales: ns@aegisinformatics.com